

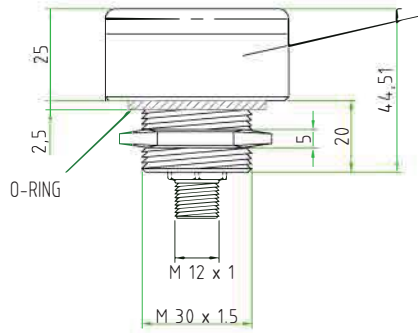





Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved

Rev.	Modify	Date	Signed	Approved



PANEL SIZE

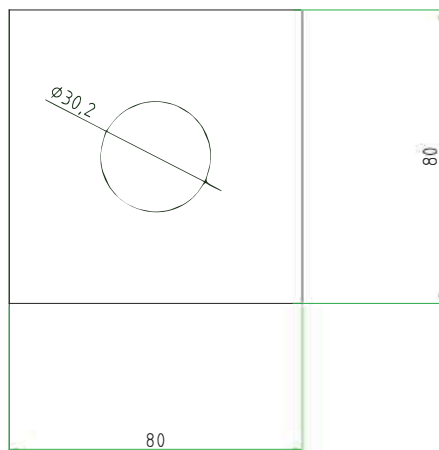

THIS PRODUCT MUST BE PACKED IN A SINGLE CARTON BOX
COMPLETE OF FEMALE CAP(CAPS JB12-M)



CAPS JB12-M

CUSTOMER APPROVAL

SIGNATURE

DATE

PLEASE SIGN
AND RETURN

CIRCULAR LIGHTING FEATURES	TYPE	CIRCULAR LED $\phi 50$ WITH M12 CONNECTOR
	CONNECTION	4 PIN M12 CONNECTOR
	COLOR TEMPERATURE	6000K
	LIFE TIME	AFTER 50000 HOUR LIGHT DECAY LESS THEN 30%
	OPERATING VOLTAGE	12-30V DC
	LIGHT COLOR	COOL WHITE
	LUMENS (25°C)	200lm
	CURRENT (12/18V)	0.208 A
	CURRENT (24V)	0.104 A
	CURRENT (30/36V)	0.083A
	POWER	2.5W
	MATERIAL	PC Windows+ Alluminium housing
	IP degrees	IP67
	OPERATING ENVIRONMENT	STORAGE TEMPERATURE -40/70 °C
	OPERATING ENVIRONMENT humidity : 90%	STORAGE TEMPERATURE -20/50 °C

Designer	SUGLIANI R.	Date	2016-04-11	Tolerance	± 0.3	Units	mm	Series	INDUSTRIAL LIGHTING	Drawing n. 1-1
Approved	CIMMINO L.	Date	2016-04-11	Scale	2:1	Size	A4	Customer code		

SENSEABLE™

DESCRIPTION

INDUSTRIAL LIGHTING, CIRCULAR LED $\phi 50$ WITH M12 CONNECTOR
MALE 4POLES 12-30V DC,

TR ELECTRONIC
... *Passionate* about Sensors.

A4

